

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 280 241 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
29.01.2003 Bulletin 2003/05

(51) Int Cl.7: **H01R 13/24**, **H01R 12/22**,  
**H01R 12/04**

(21) Application number: **02255280.6**

(22) Date of filing: **29.07.2002**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**IE IT LI LU MC NL PT SE SK TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

(72) Inventors:  
• **Clements, Bradley E.**  
**FT Collins, CO 80526 (US)**  
• **White, Joseph**  
**Windsor, CO 80550 (US)**

(30) Priority: **27.07.2001 US 917361**


(74) Representative: **Tollett, Ian et al**  
**Williams Powell**  
**4 St. Paul's Churchyard**  
**London EC4M 8AY (GB)**

(71) Applicant: **Hewlett-Packard Company**  
**Palo Alto, CA 94304 (US)**

**(54) Electrical contact**

(57) An electrical contact is designed with a plurality of spiraling legs such that when compressed, the spiral legs create a rotation of the top of the contact resulting in a wiping action to the contacting device or pad. The

resulting micro-spider contact may be used for a wide variety of non-permanent or permanent electrical connection purposes including use in construction of an interposer.

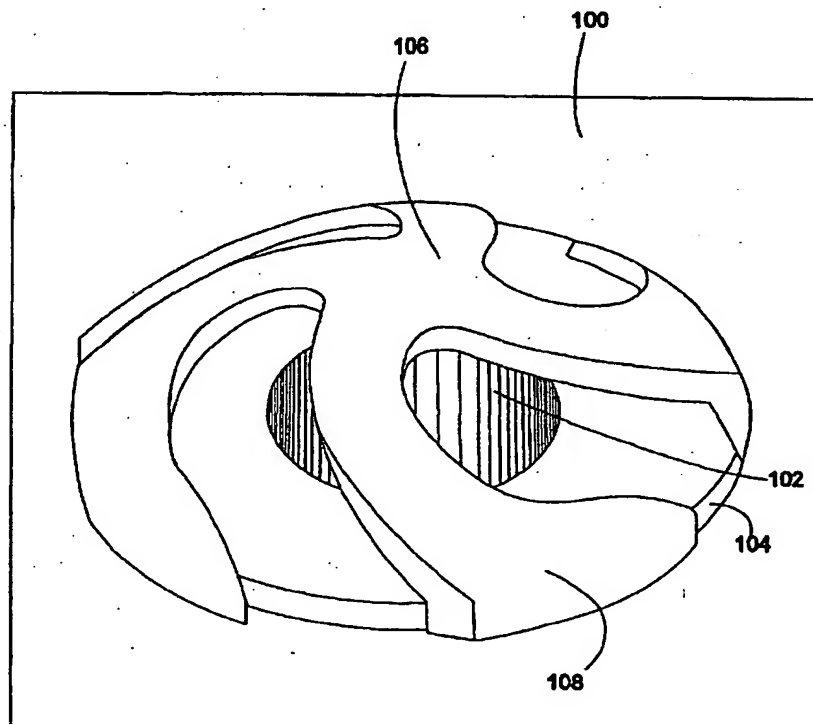

**FIG. 1**

**EP 1 280 241 A1**

## Description

[0001] This invention relates generally to an electrical contact and more specifically to an electrical contact incorporating a wiping action.

[0002] In designing electrical devices, modular structures are often used to allow non-permanent attachment of modules. This allows for upgrading or repairing of devices without requiring expensive reworking of the circuit board. Non-permanent attachment of modules also allows field replacement of defective or out-of-date modules. Reusable non-permanent electrical contacts require the ability to make reliable electrical contacts with a module over repeated connection and disconnection of the contacts. The contacts also are required to withstand a large number of connection and disconnection cycles without sustaining damage. Also, as electrical designs shrink in size there is pressure to design reliable contacts as small as possible.

[0003] One specific type of electrical contact is an interposer. Interposers are placed between two electrical devices. One of the devices may be a circuit such as a multi-chip module (MCM) and the other may be a printed circuit board. As electrical devices shrink in size, interposers must also allow for increased contact densities while still allowing repeated, reliable electrical contacts. Existing electrical contact designs include interposers constructed from elastomeric material and interposers constructed from balls of wire. Both of these solutions have limitations inherent in their design. Current elastomeric materials are unable to sustain adequate contact spring force over time and temperature and have a small range of working heights. Interposers constructed from balls of wire are fragile, often prone to unravel, require costly inspection, and provide a limited amount of contact travel.

[0004] An electrical contact is designed with a plurality of spiraling legs such that when compressed, the spiral legs create a rotation of the top of the contact resulting in a wiping action to the contacting device or pad. The resulting micro-spider contact may be used for a wide variety of non-permanent or permanent electrical connection purposes including use in construction of an interposer.

[0005] Other aspects and advantages of the present invention will become apparent from the following detailed description, taken in conjunction with the accompanying drawings, illustrating by way of example a number of preferred embodiments of the invention.

Figure 1 is a perspective view of an embodiment of a micro-spider contact according to the present invention.

Figure 2A is a top view of an embodiment of a clockwise micro-spider contact according to the present invention.

Figure 2B is a top view of an embodiment of a counter-clockwise micro-spider contact according to the

present invention.

Figure 3 is an oblique view of a plurality of micro-spider contacts according to an embodiment of the present invention.

Figure 4 is a cross-sectional view of an embodiment of the present invention illustrating micro-spiders constructed on opposite sides of a substrate.

Figure 5A is a cross-sectional view of an embodiment of the present invention illustrating a single pair of micro-spider contacts.

Figure 5B is a cross-sectional view of an embodiment of the present invention illustrating a single pair of micro-spider contacts.

Figure 6 is an oblique view of an embodiment of the present invention illustrating a single clockwise micro-spider and a single micro stop.

Figure 7 is a cross-sectional view of an embodiment of the present invention illustrating a single pair of micro-spiders and a single pair of micro stops.

Figure 8 is a perspective view of an embodiment of a three-legged counter-clockwise micro-spider according to the present invention.

Figure 9 is a perspective view of an embodiment of an array of three-legged counter-clockwise micro-spiders according to the present invention.

Figure 10 is a cross-sectional view of an embodiment of the present invention illustrating micro-spiders constructed on a first side of a substrate and ball grid array (BGA) balls constructed on a second side of a substrate.

[0006] Figure 1 is a perspective view of an embodiment of a specialized electrical contact created pursuant to the present invention referred herein to as a micro-spider contact, or simply as a micro-spider. In Figure 1 the micro-spider 106, is an example embodiment of the present invention with four spiraling legs 108 attached to an area of metal 104 surrounding a through-plated hole 102 in a substrate 100 material. The micro-spider 106 is preferably constructed from a thin sheet of metal, and may be fabricated by a variety of methods. One method for constructing micro-spiders is described further in a U.S. patent application, Serial No. 09/917,357 "Method for the Fabrication of Electrical Contacts", filed concurrently with the priority document of the present application, and incorporated herein by reference. Another method for the fabrication of micro-spiders is described in a U.S. patent application, Serial No. 09/917,093 "Method for the Fabrication of Electrical Contacts", filed concurrently with the priority document of the present application, and incorporated herein by reference. Note that other embodiments of the present invention may include micro-spiders with 3 legs 108, or 5 or more spiraling legs 108. In the example embodiment of the present invention shown in Figure 1 the legs 108 of the micro-spider 106 spiral in a clockwise direction. Note that micro-spiders 106 may be constructed with legs 108 spiraling in either a clockwise or counter-

clockwise direction within the scope of the present invention. In fact, in certain applications of the concepts of the present invention it may be desirable to include both clockwise and counter-clockwise micro-spiders 106 in the same device. By mixing the two types of micro-spiders in an approximately equal amount and approximately equal distribution, the slight rotational torque applied as each micro-spider 106 contact is compressed is approximately equalized between the clockwise and counter clockwise direction, resulting in a very small net rotational torque.

[0007] Figure 2A is a top view of an embodiment of a clockwise micro-spider contact according to the present invention. The micro-spider 106 shown in Figure 2A is identical to the device of Figure 1 as seen from the top. Again, micro-spider 106, preferably includes four spiraling legs 108 attached to an area of metal 104 surrounding a through-plated hole 102 in a substrate 100 material. Figure 2B is a top view of an embodiment of a counter-clockwise micro-spider contact according to the present invention. The micro-spider 106 shown in Figure 2B is similar to the device of Figure 2A except with counter-clockwise spiraling legs 108 instead of the clockwise spiraling legs 108 shown in Figure 2A.

[0008] Figure 3 is a perspective view of a plurality of micro-spider contacts according to an embodiment of the present invention. The example illustrates an array of micro-spiders 106 on a substrate 100. In this embodiment, all of the micro-spiders 106 shown are clockwise micro-spiders 106. In other embodiments of the present invention, counter-clockwise micro-spiders 106 may be used, or a combination of clockwise and counter-clockwise micro-spiders 106 may be used.

[0009] In a specific example embodiment of the present invention, micro-spiders 106 are preferably constructed on both sides of the substrate 100 creating an interposer for use in non-permanently attaching electronic devices such as a multi-chip module (MCM) to a circuit board. Figure 4 is a cross-sectional view of such an embodiment. The example embodiment of the present invention shown in Figure 4 illustrates a plurality of micro-spiders 106 constructed on opposite sides of a substrate 100, connected together by through-plated holes 102 surrounded by areas of metal 104 contacting the legs 108 of the micro-spiders 106. This example embodiment of the present invention may be employed as an interposer for use in non-permanently attaching electronic devices such as a MCM to a circuit board.

[0010] Figure 5A is a cross-sectional view of an embodiment of the present invention illustrating a single pair of micro-spider contacts. The device of Figure 5A illustrates a counter-clockwise micro-spider 106 similar to the device shown in Figure 2B on the top surface of the substrate 100, and a clockwise micro-spider 106 similar to the device shown in Figure 2A on the bottom surface of the substrate 100. The two micro-spiders 106 are preferably electrically connected to each other by a through-plated hole 102 in the substrate 100 where

each hole 102 is surrounded by an area of metal 104 electrically and mechanically contacting the legs 108 of the micro-spiders 106.

[0011] Figure 5B is a cross-sectional view of another embodiment of the present invention illustrating a single pair of micro-spider contacts. The device of Figure 5B illustrates a clockwise micro-spider 106 similar to the device shown in Figure 2A on the top surface of the substrate 100, and a counter-clockwise micro-spider 106 similar to the device shown in Figure 2B on the bottom surface of the substrate 100. The two micro-spiders 106 are preferably electrically connected to each other by a through-plated hole 102 in the substrate 100 where each hole 102 is surrounded by an area of metal 104 electrically and mechanically contacting the legs 108 of the micro-spiders 106.

[0012] In some example embodiment of the present invention, it may be preferable to add a micro stop to prevent over-compression of the micro-spiders when connecting to a device such as a printed circuit board (PCB) or MCM. Figure 6 is a perspective view of an embodiment of a single clockwise micro-spider and a single micro stop according to the present invention. The addition of a micro stop 600 to a device comprising at least one micro-spider 106 allows the connection of, say, a MCM to the device without over-compressing the legs 108 of the micro-spiders 106. The micro stop preferably halts further compression of the micro-spiders 106 when the devices are a pre-determined distance apart, as set by the height of the micro stop 600. The example embodiment of the present invention of Figure 6 shows a clockwise micro-spider 106 electrically connected to the metal 104 surrounding a through-plated hole 102 in a substrate 100.

[0013] Figure 7 is a cross-sectional view of an embodiment of a single pair of micro-spiders 106 and a single pair of micro stops 600 according to the present invention. A clockwise micro-spider 106 similar to that described in connection with Figure 2A is shown on the top surface of the substrate 100, and a counter-clockwise micro-spider 106 similar to that described in connection with Figure 2B is shown on the bottom surface of the substrate 100. The two micro-spiders 106 are electrically connected to each other by a through-plated hole 102 in the substrate 100 where each hole 102 is surrounded by an area of metal 104 electrically and mechanically contacting the legs 108 of the micro-spiders 106. The two micro stops 600 may be constructed by a variety of methods within the scope of the present invention. The height of the micro stops 600 is determined by the structure and materials used in creating the micro-spiders 106. The micro stops 600 are preferably short enough to allow enough compression of the micro-spiders 106 such that the spiraling legs 108 cause the top of the micro-spiders 106 to rotate slightly creating a wiping action on the device with which they are brought into contact. This wiping action may physically remove oxides or other contaminants from the device the micro-spiders 106

are contacting, thereby creating a more reliable electrical contact than would be obtained by a similar contact without any wiping action. The micro stops 600 are preferably tall enough to prevent the contacting device from over-compressing the legs 108 of the micro-spiders 106. If the legs 108 are over-compressed, they may deform or break. If the legs 108 deform, their useful life as a re-usable contact may be shortened because they may not be able to create the wiping action, and they may become brittle due to strain hardening and may eventually break.

[0014] Micro-spiders may be made with a variety of numbers of legs 108. Note that any number of legs greater than one may be used in creating a micro-spider 106 within the scope of the present invention. Figure 8 is a perspective view of an embodiment of a three-legged counter-clockwise micro-spider according to the present invention. It will be appreciated that a three-legged micro-spider 800 allows a different amount of wiping action and spring force than an equivalent four-legged micro-spider 106 previously described in connection with Figures 1 through 7. This three-legged micro-spider 800 embodiment of the present invention comprises spiraling legs 108 attached to an area of metal 104 surrounding a through-plated hole 102 in a substrate 100 material.

[0015] Figure 9 is a perspective view of an embodiment of an array of three-legged counter-clockwise micro-spiders according to the present invention. In this example embodiment, all of the micro-spiders 800 shown are counter-clockwise three-legged micro-spiders 800 on a substrate 100. In other embodiments of the present invention, clockwise three-legged micro-spiders 800 may be used, or a combination of clockwise and counter-clockwise three-legged micro-spiders 800 may be used. In further embodiments of the present invention, three-legged micro-spiders 800 may be constructed on both sides of the substrate 100 creating an interposer for use in non-permanently or permanently attaching electronic devices such as a multi-chip module (MCM) to a circuit board.

[0016] In a specific example embodiment of the present invention, micro-spiders 106 are preferably constructed on a first side of the substrate 100 and ball grid array balls 1000 are preferably constructed on a second side of the substrate 100, creating an interposer for use in non-permanently attaching electronic devices such as a multi-chip module (MCM) to a circuit board. Figure 10 is a cross-sectional view of such an embodiment. The example embodiment of the present invention shown in Figure 10 illustrates a plurality of micro-spiders 106 constructed on a first side of a substrate 100, and ball grid array (BGA) balls 1000 constructed on a second side of a substrate 100, connected together by through-plated holes 102 surrounded by areas of metal 104 contacting the micro-spiders 106. This example embodiment of the present invention may be employed as an interposer for use in non-permanently attaching electronic devices

such as a MCM to a circuit board, while the interposer is attached to the circuit board by the BGA balls 1000.

## 5 Claims

### 1. An electrical contact 106 comprising:

spiraling legs 108 configured to create a wiping action on a metal pad when compressed by said pad.

### 2. An electrical contact 106 as claimed in claim 1, wherein said spiraling legs 108 form a dome shape.

### 3. An electrical contact 106 as claimed in claim 1 or 2, further comprising:

a micro stop 600 of sufficient height to prevent over-compression of said spiraling legs 108 of said electrical contact 106.

### 4. An electrical contact 106 as claimed in any preceding claim, wherein said electrical contact 106 comprises at least 2 legs 108.

### 5. An electrical contact 106 as claimed in any preceding claim, wherein said electrical contact 106 is constructed from copper.

### 6. An interposer comprising:

at least two electrical contacts 106 one on each opposing sides of a substrate 100; wherein said electrical contacts 106 include spiraling legs 108 configured to create a wiping action on metal pads when compressed by said pads.

### 7. An interposer as claimed in claim 6, wherein said spiraling legs 108 form a dome shape.

### 8. An interposer as claimed in claim 6 or 7, further comprising:

at least one micro stop 600 of sufficient height to prevent over-compression of said spiraling legs 108 of said electrical contacts 106.

### 9. An interposer as claimed in any of claims 6 to 8, wherein said electrical contacts 106 are disposed opposite each other on opposing sides of said substrate 100 and are electrically connected by through-plated holes 102 in said substrate 100.

### 10. An interposer comprising:

a plurality of electrical contacts 106 on a first side of a substrate 100; wherein said electrical

contacts **106** include spiraling legs **108** configured to create a wiping action on metal pads when compressed by said pads, and a plurality of ball grid array balls **1000** on a second side of said substrate **100**.

5

10

15

20

25

30

35

40

45

50

55

5

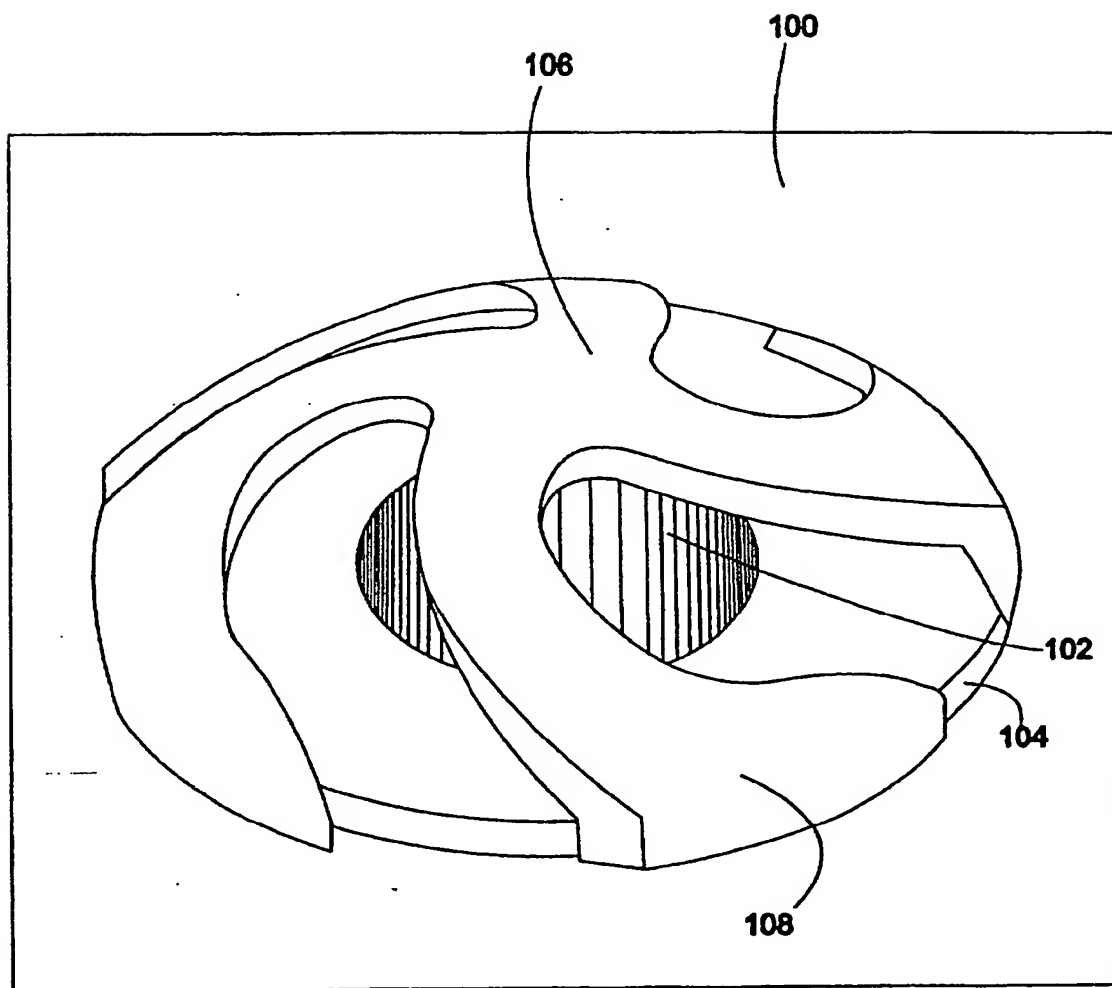


FIG. 1


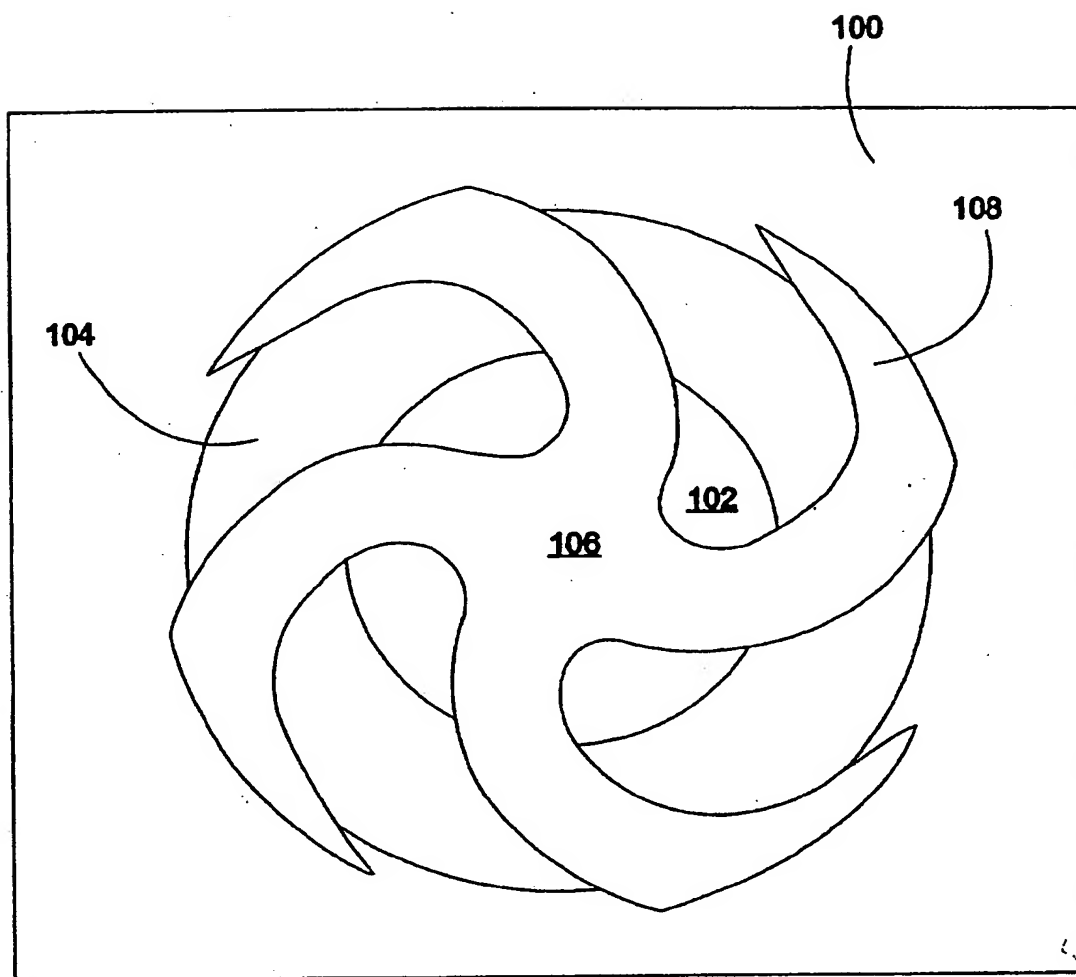


FIG. 2A

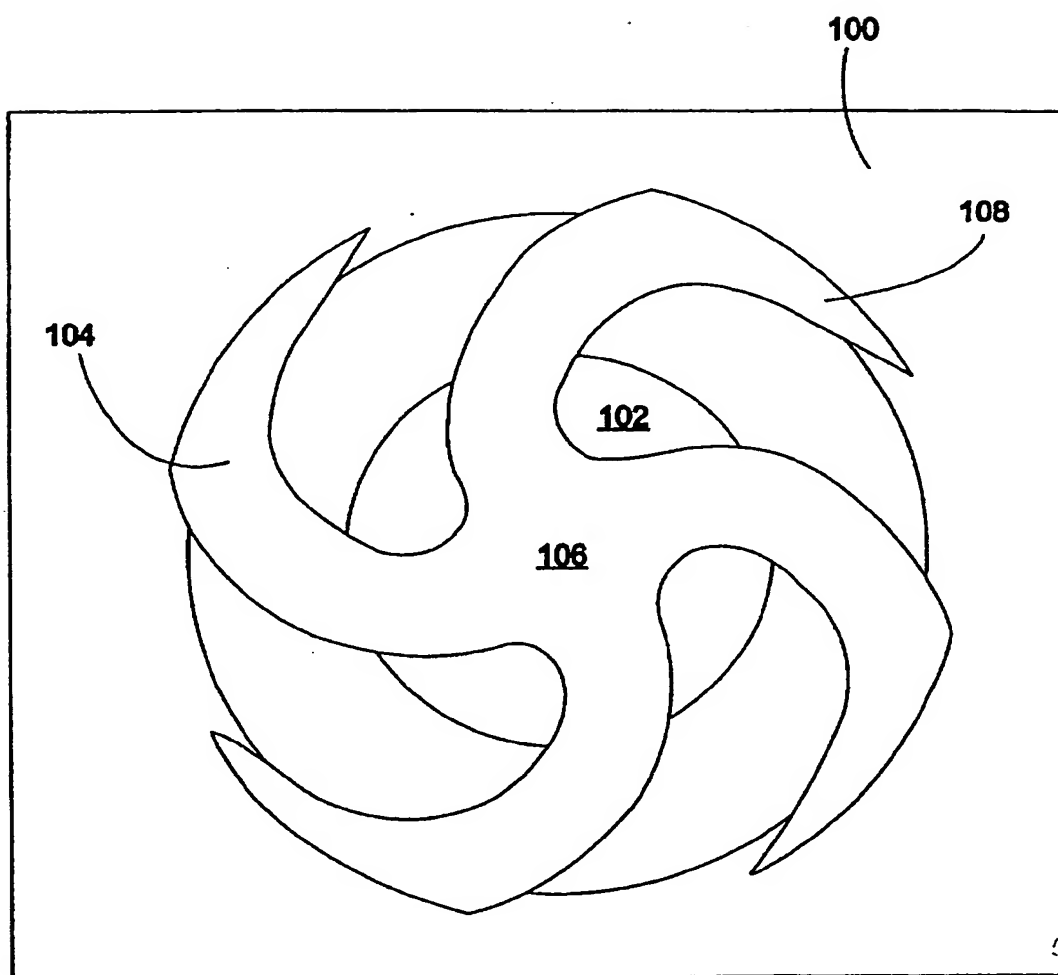

**FIG. 2B**



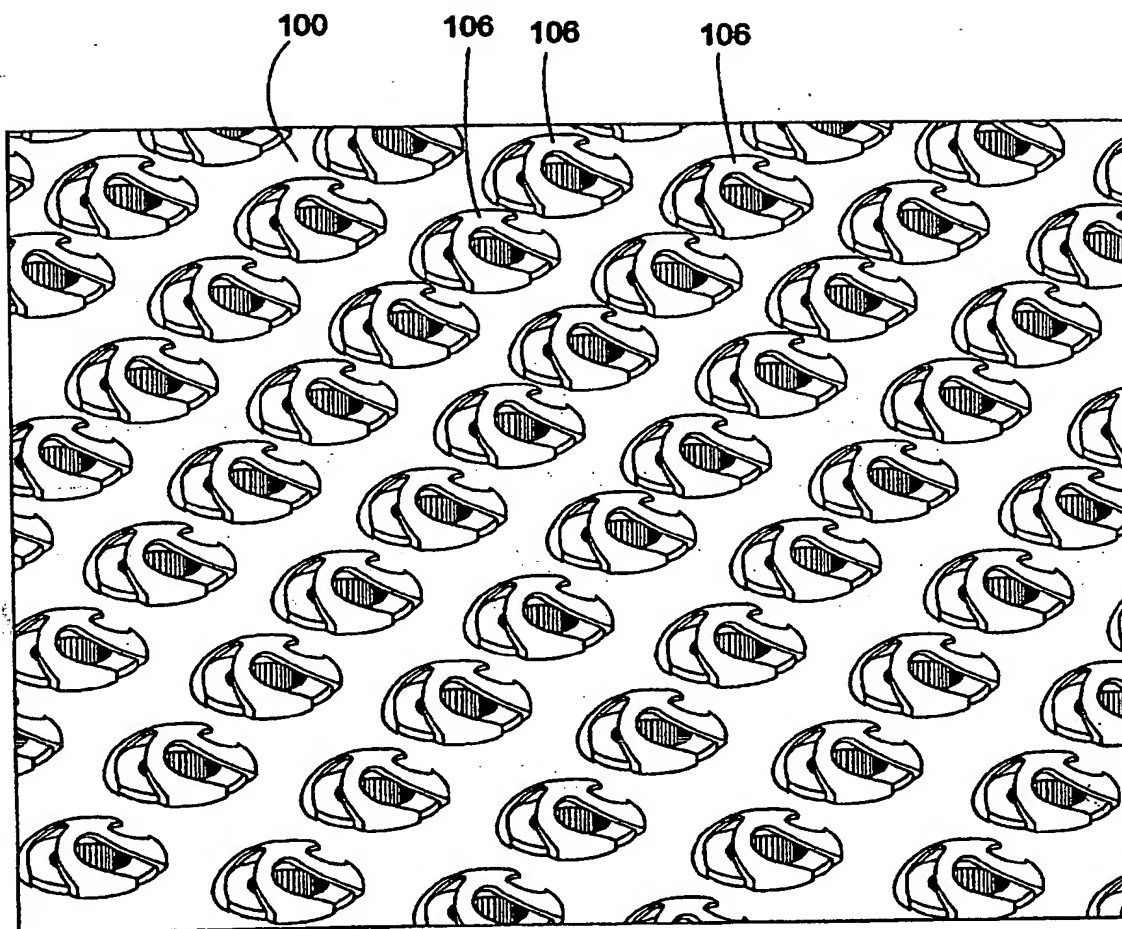


FIG. 3

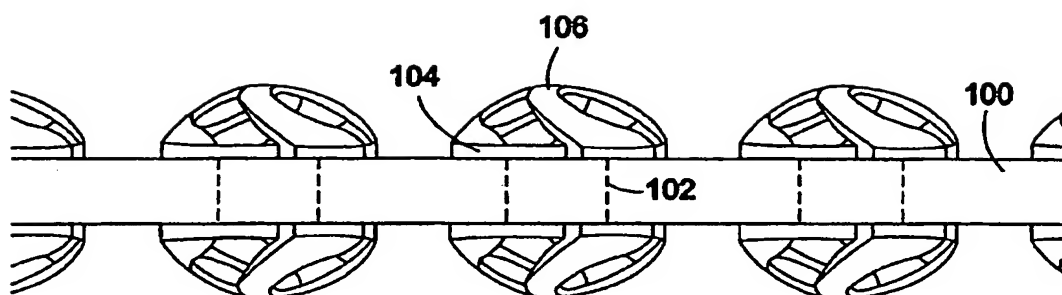


FIG. 4

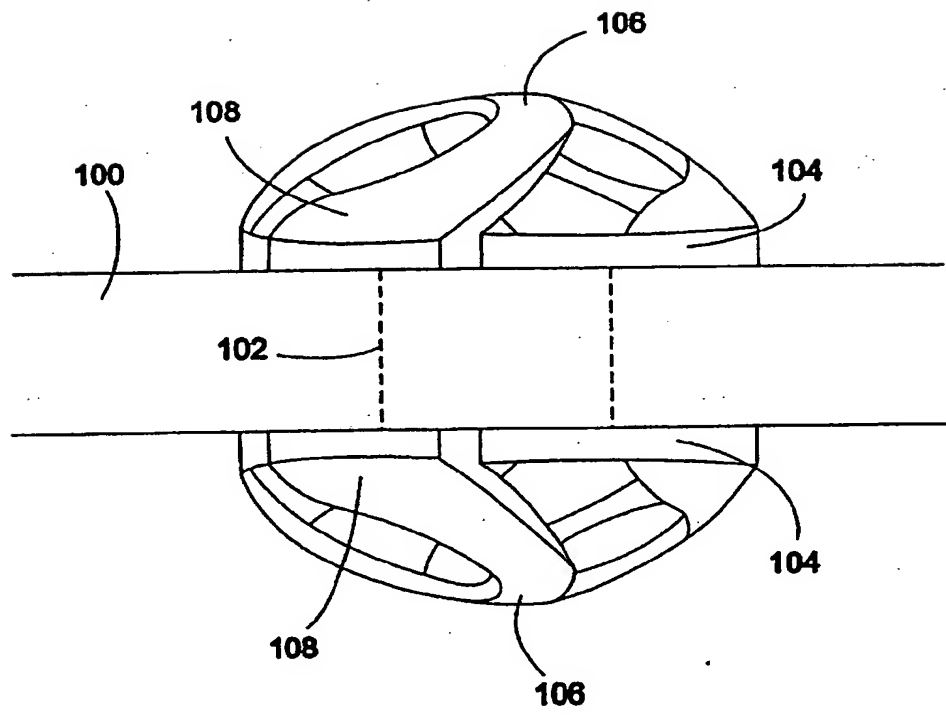


FIG. 5A

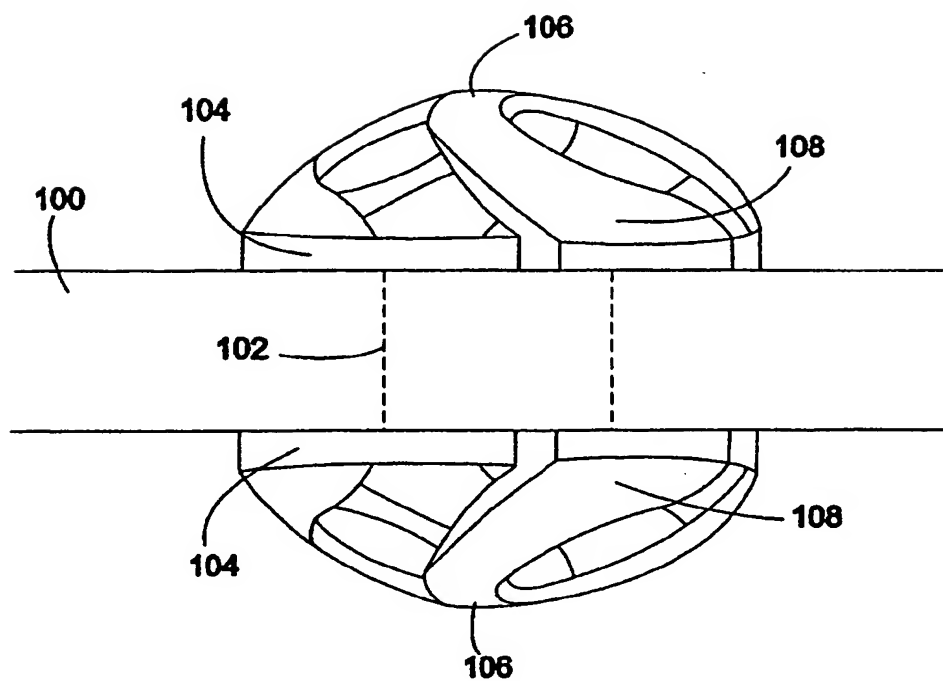


FIG. 5B

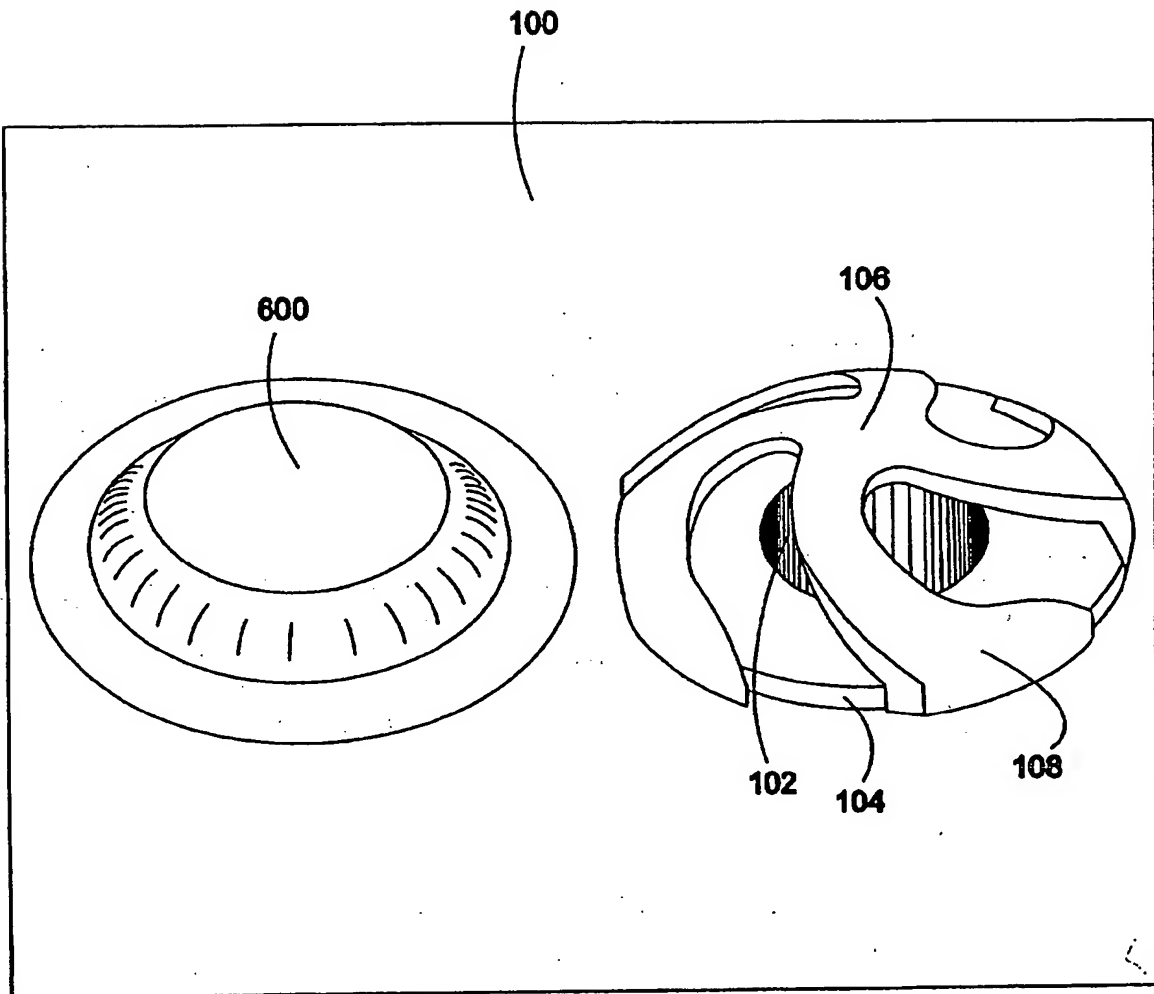


FIG. 6

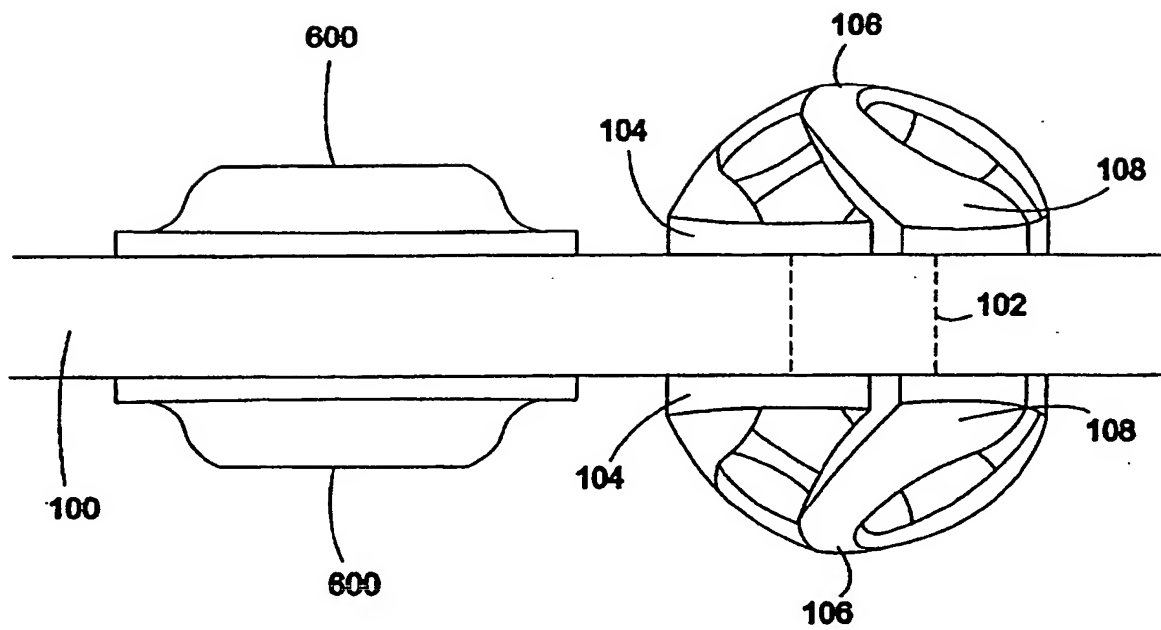


FIG. 7

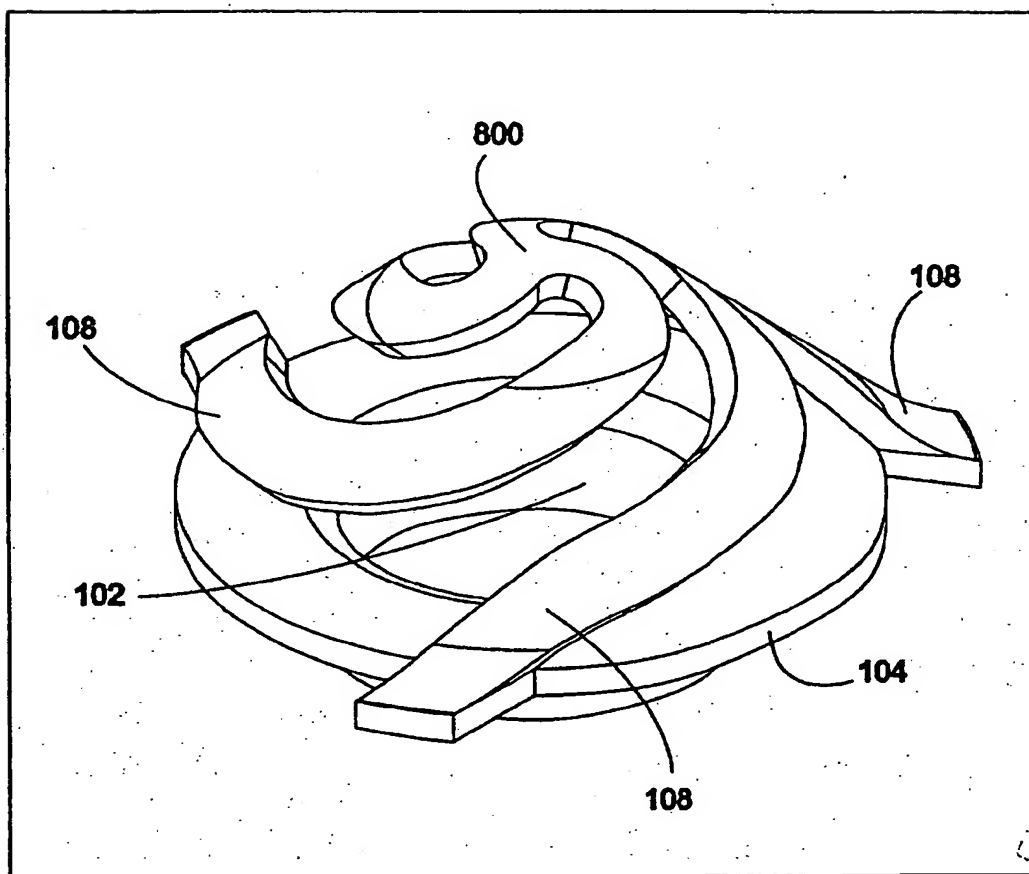


FIG. 8

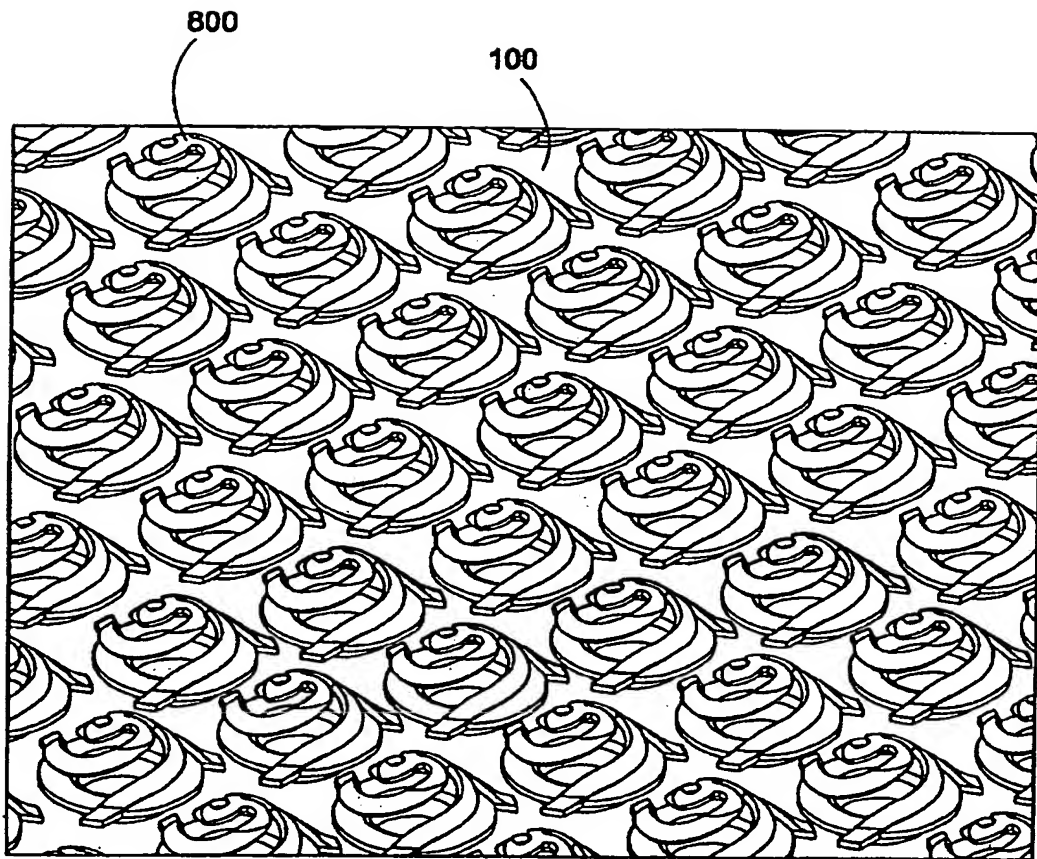


FIG. 9



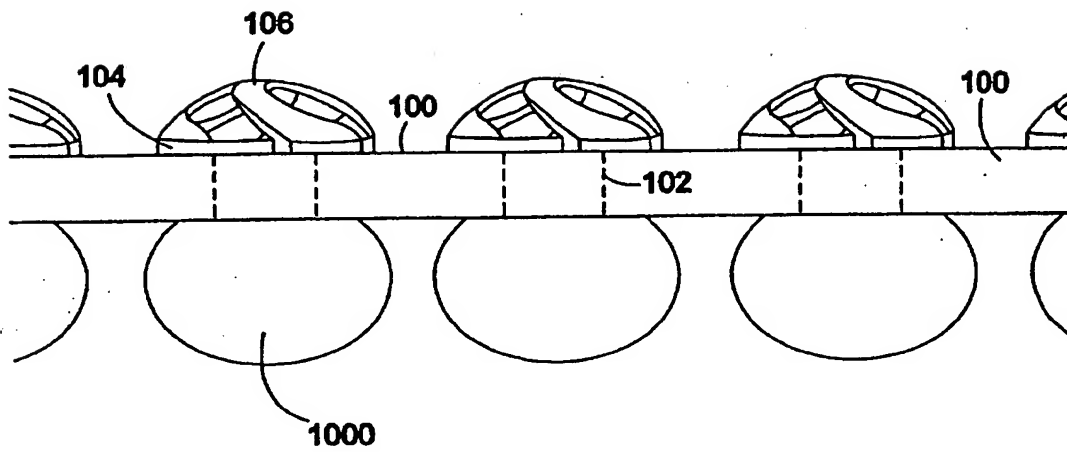


FIG. 10



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 02 25 5280

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 1 049 205 A (BERG ELECTRONICS MFG) 2 November 2000 (2000-11-02)	1-8,10	H01R13/24 H01R12/22 H01R12/04
Y	* column 1, line 48 - column 2, line 6 * * column 3, line 52 - column 4, line 6 * * column 4, line 25 - column 4, line 50 * * column 5, line 3 - column 5, line 16 * * column 5, line 42 - column 6, line 7; figures 1-5B *	9	
Y	--- US 5 071 359 A (ARNIO BARBARA E ET AL) 10 December 1991 (1991-12-10) * column 3, line 18 - column 3, line 40 * * column 3, line 56 - column 4, line 1; figures 1-3A *	9	
A	--- US 5 366 380 A (REYMOND WELLES K) 22 November 1994 (1994-11-22) * figures 3A-9 *	1,2,4,6, 7	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H01R H05K
The present search report has been drawn up for all claims			
Place of search BERLIN		Date of completion of the search 26 November 2002	Examiner Ledoux, S
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 (3.8.92) (P4/C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 02 25 5280

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

26-11-2002

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1049205	A	02-11-2000	US	6193523 B1	27-02-2001
			EP	1049205 A2	02-11-2000
			JP	2000353560 A	19-12-2000
			TW	449126 Y	01-08-2001
-----					
US 5071359	A	10-12-1991	DE	4113954 A1	31-10-1991
			JP	4230984 A	19-08-1992
			US	5245751 A	21-09-1993
-----					
US 5366380	A	22-11-1994	US	4966556 A	30-10-1990
			US	5256073 A	26-10-1993
			US	5215471 A	01-06-1993
			CA	2158253 A1	13-10-1994
			EP	0746884 A1	11-12-1996
			JP	8508613 T	10-09-1996
			WO	9423475 A1	13-10-1994
			US	5425649 A	20-06-1995
			AU	5920590 A	08-01-1991
			CA	2060313 A1	14-12-1990
			DE	69030183 D1	17-04-1997
			DE	69030183 T2	09-10-1997
			EP	0479852 A1	15-04-1992
			JP	4506279 T	29-10-1992
			WO	9016097 A1	27-12-1990
			US	5160270 A	03-11-1992
			AU	650212 B2	09-06-1994
			AU	9021691 A	26-05-1992
			CA	2095119 A1	30-04-1992
			DE	69131136 D1	20-05-1999
			DE	69131136 T2	09-12-1999
			EP	0555368 A1	18-08-1993
			JP	6502739 T	24-03-1994
			JP	3090470 B2	18-09-2000
			WO	9208258 A1	14-05-1992
-----					

EPO FORM PAPER

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

